


Compression Latches - Flexi-System

insert driver - fixed grip - zinc

Access Hardware

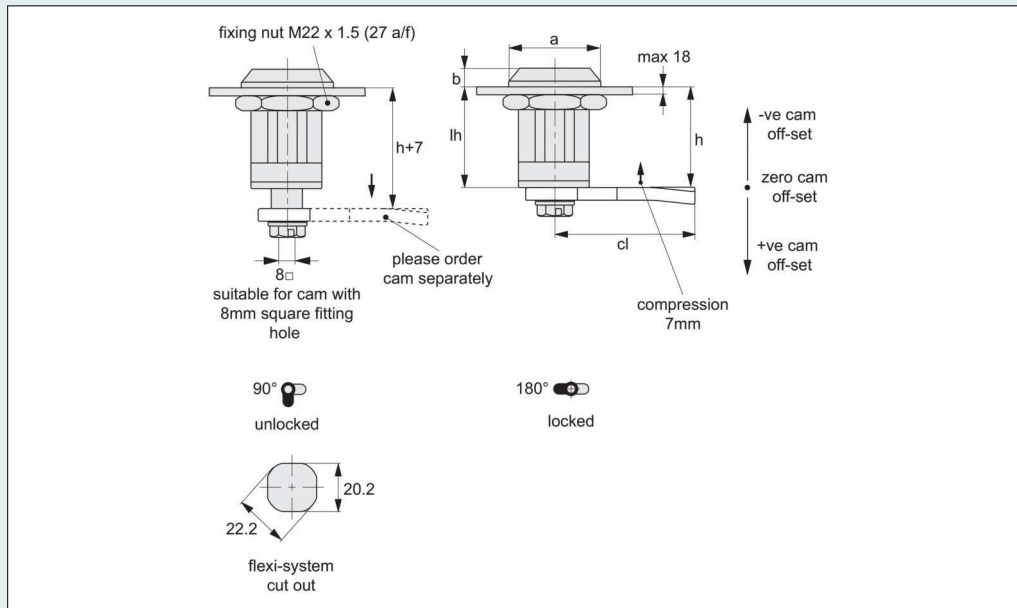

CC0800

Material

Body & insert: die cast zinc, finished in chrome plate or black powder coating. Insert fitted with O'ring to provide IP54 rating.
Handle: polyamide.

Not supplied: CAM nor KEY - order separately.

Technical notes

Order cam and key separately.

Cams: see suitable cam CC0020.

Select "without projection" cam type.
Dimensions ch and cl relate to cam.

Use formula to calculate ch (required cam off-set), and refer to cam selection chart;

ch = h - lh where;

ch = required cam off-set/height.

h = grip length (distance between inside of latch face and front of cam).

lh = body length of cam latch/lock to be used (see product table below).

Keys: see CC0010.

Tips

Compression locks provide sealing of enclosures to reduce vibration and to provide noise isolation.

Action:

From unlocked position, first 90° turn moves the cam to the locking position. Turn lock 180° to engage compression, cam moves to final fixing position.

Provides a 7mm compression stroke.

Referral

Adj. grip compression latch - CC0810.
Dust caps - CC0305.

Gaskets - GA0010 to GA0100.

Other insert types subj. to min. qty.

Order No.	Finish	Insert driver	a	b	lh
CC0800.M0020	Chrome Plated	Square 8	28	5,5	31
CC0800.M0040	Chrome Plated	Triangle 7	28	5,5	31
CC0800.M0050	Chrome Plated	Triangle 8	28	5,5	31
CC0800.M0080	Chrome Plated	Slot (2x4)	28	5,5	31
CC0800.M0085	Chrome Plated	Hexagon 8	28	5,5	31
CC0800.M0320	Black Coated	Square 8	28	5,5	31
CC0800.M0340	Black Coated	Triangle 7	28	5,5	31
CC0800.M0350	Black Coated	Triangle 8	28	5,5	31
CC0800.M0380	Black Coated	Slot (2x4)	28	5,5	31
CC0800.M0385	Black Coated	Hexagon 8	28	5,5	31

Compression Latches - Flexi-System

insert driver - fixed grip - zinc

Access Hardware

